

LAD-6250-PL Two-Sided Front & Back Labeler

SPECIFICATIONS

Standard Construction: Stainless steel &

anodized aluminum

Max Web Width: 7" (178mm)

Dispensing Speed: Up to 36M/min

Conveyor Speed: Up to 36M/min

Label Roll Inside Diameter: 3" (76mm)

Label Roll Outside Diameter: 14" (356mm)

Electrical:

- Stepper Motor Drive
- Touch screen controls

Power Requirement:

120VAC, single phase, 50-60Hz

Dimensions:

- Length 107" (2718mm)
- Width 69.13" (1756mm)
- Height 56.26" (1429mm)
- Typical Line Height 36" approx.
- Weight 617.5lbs (280kgs)
- Belt Width 6 5/16" (160mm)

OPTIONS

- Clear Label Sensor
- 8in or 10in Web Width Upgrade
- 7in, 8in or 10in Wrap Labeling Feature
- Conveyor Length Upgrade to 118" (3M)
- Timing Screw Upgrade
- Hot Stamp Coder Integration
- Special electrical requirements
- Custom applications

The LAD-6250-PL Two-Sided Front & Back Labeler provides an impressive yet cost-effective solution for pressure sensitive adhesive label application. This Labeler is suitable for various one-sided or two-sided labeling. An optional wrap station is offered for wrap labels on round bottles.

Standard features include a Stepper Motor Drive, which delivers accurate and high-speed repeatable labeling, automatic label head and conveyor belt speed synchronization, and Alignment System with Top Hold-Down Belt. The LAD-6250-PL offers many other standard features easily making any production line more efficient. Options are available for even more versatility.


This Two-Sided Front & Back Labeler is used in the cosmetic, food and beverage, cleaning and specialty chemical, pharmaceutical, and personal care industries.

LAD-6250-PL Two-Sided Front & Back Labeler



Standard Features:

- Tilt Label Head with Dual Web Take-up Reels
- Touch screen control with auto teach function for new labels
- One touch automatic label detection and setup
- Built-in touch screen operation manual with troubleshooting guide
- Low or Missing Label Detection with automatic stop system to prevent mislabeling
- Stepper Motor Drive for label and power assisted web take up
- Alignment System with Top Hold-Down Belt
- Synchronized label head and conveyor speeds
- Non-contact Photo Eye Sensors
- Label Counter
- Count Down Feature with Auto Shut-off (for precise run of set number of labels)

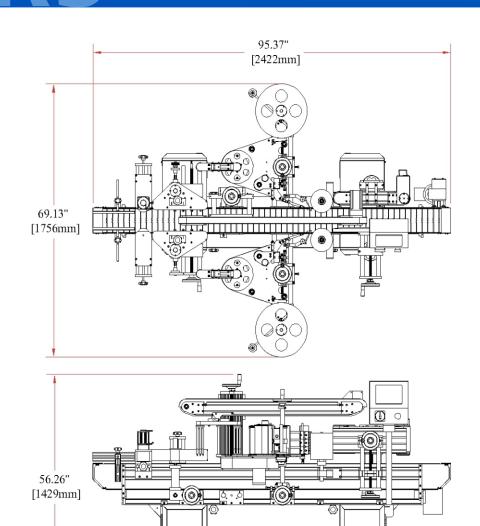

- Complete line of filling and packaging solutions
- ·Standard filling machines in stock and ready to ship
- Economical prices, installation services and excellent customer service



1500 Lake Street, La Porte, Indiana 46350
Toll Free: 866-369-9030 Fax: 574-975-2711
sales@apackaging.com
www.apackaging.com