

BOTTLING & PACKAGING CONVEYORS



APACKS variable speed Conveyors are manufactured to increase the efficiency of your production line. They are available in a variety of lengths, widths and straight or curved sections to fit your space and production requirements.

Our standard construction is comprised of a heavy duty 304 stainless steel frame. Optional models are available for sanitary, hazardous, flammable and corrosive production lines.

APACKS Conveyors are used in the production of cosmetics, food and beverages, cleaning and specialty chemicals, pharmaceuticals, personal care and more.

SPECIFICATIONS

Standard Construction: Heavy duty 304SS frame with Acetal straight running chain

Standard Belt Widths: 4.5", 7.5", 10" or 12"

Standard Lengths: 5', 7.5', 10', 12.5', 15' or 20'

Standard Height: 36" +/- 2"


Electrical:

- 90VDC gear motor
- Variable speed NEMA 12 control box

Power Requirement: 115VAC, single phase, 10A, 50-60Hz

Standard Features:

- Stainless steel single rail with tool-less adjustments
- Standard 4.5" wide conveyors handle container diameters up to 6"

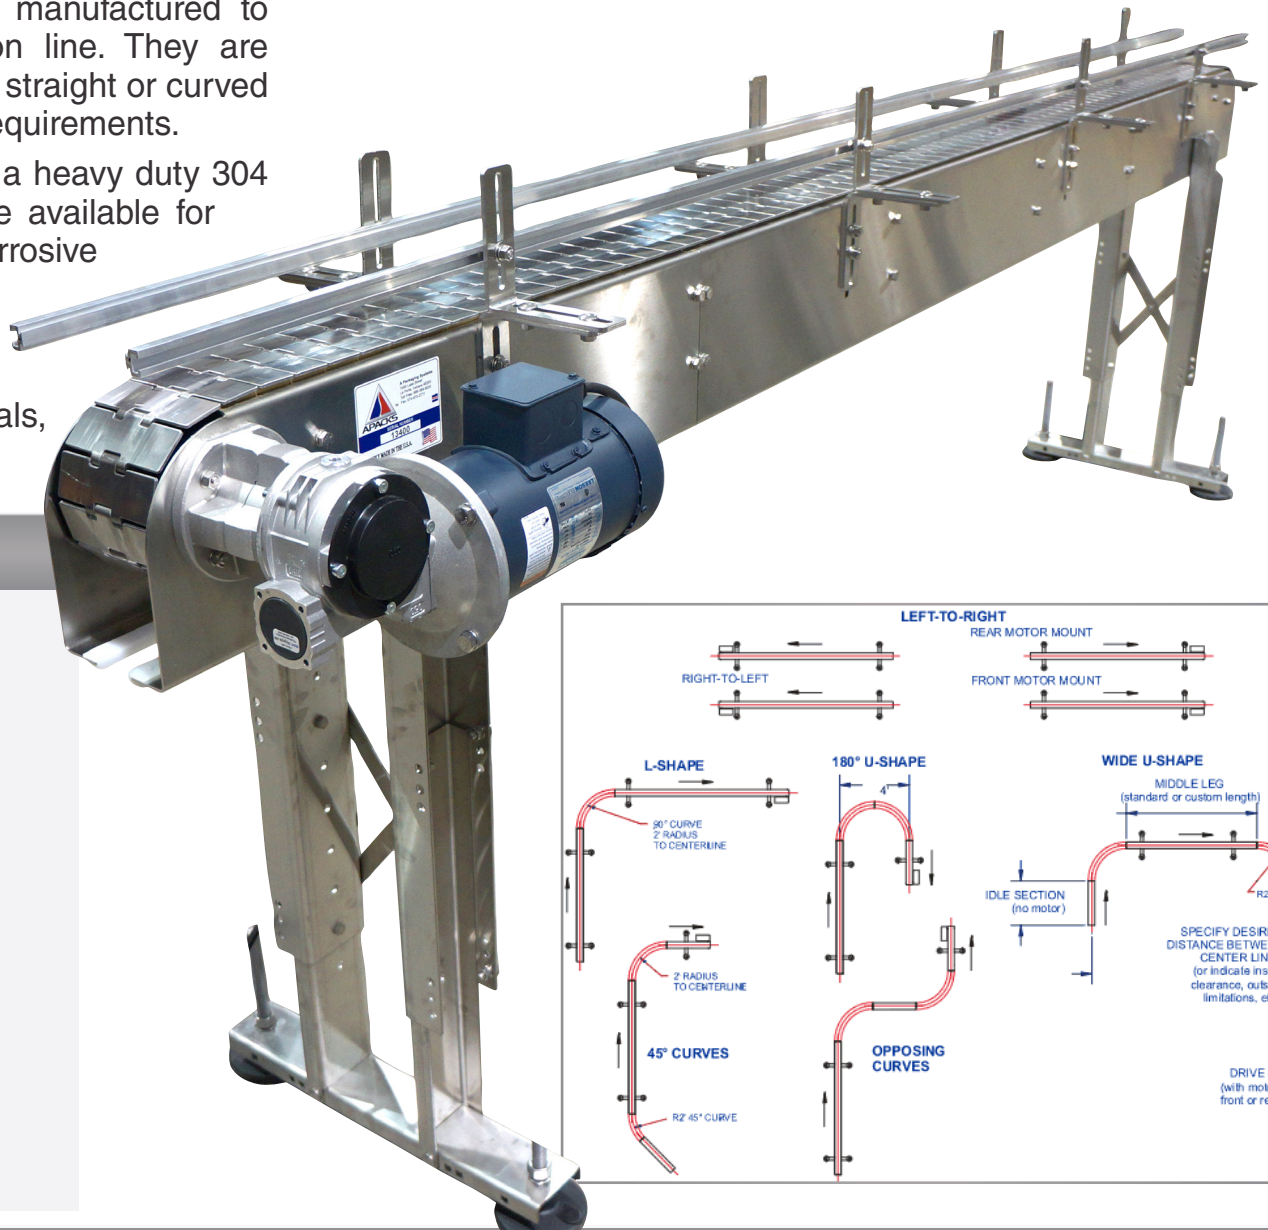

BOTTLING & PACKAGING CONVEYORS



OPTIONS

- Double Rail System
- Custom height and widths
- Sanitary, hazardous, flammable and corrosive environment construction
- Curved 90/45 degree sections for L-, U- or S-shapes
- Additional (remote) E-stop stations
- Swivel casters for portability
- Custom applications
- Accumulating or transitional configurations
- Special electrical requirements
- Washdown motor
- Beltway washing station
- Washdown construction
- NEMA 4 or NEMA 4x control box



- *Complete line of filling and packaging solutions*
- *Standard filling machines in stock and ready to ship*
- *Economical prices, installation services and excellent customer service*

1500 Lake Street, La Porte, Indiana 46350
Local & Outside US: 219-369-4131
Toll Free: 866-369-9030
Fax: 574-975-2711

sales@apacks.com
www.apacks.com